

Since 1901 the Chicago Pneumatic name has represented reliability and attention to customer needs, with tools and compressors designed for specific industrial applications. Today, Chicaco Pneumatic. has a global reach, with local distributors around the world. Our people start every single day with a passion to research, develop, manufacture and deliver new products that are meant to meet your needs not only today, but tomorrow as well. To learn more, visit www.cp.com.

Chicago Pneumatic: full offer, global presence













Chicago Pneumatic Compressors

Sveanagar, Mumbai Pune Highway, Dapodi, Pune - 411012 Maharashtra, India. Phone: + (91) 93 7191 9200 / 93 2417 4988







Regional Customer Centres

BRANCH	ADDRESS	SALES J	SERVICE J	EMAIL
WEST	Rushabh, II Floor, Near American Heart Institute, Ghodbunder Road, Thane (W) 400601	93241 74565	93256 36552	sales.west@cp.com service.west@cp.com
NORTH	Unitech Business Park, Tower - A, First Floor, Block - F, Sector -41, South City -I ,Gurgaon - 122001	93124 06866	93124 17744	sales.north@cp.com service.north@cp.com
EAST	Trinity Plaza, 2nd Floor, East Wing, 84/1A, Topsia Road, (South) Kolkata 700 046	93322 90559	93322 91224	sales.east@cp.com service.east@cp.com
CENTRAL	4th Floor, Block A, Amsri Shamira Building, Old Lancer Lines, Secunderabad 500 025	8886178825	93924 06641	sales.central@cp.com service.central@cp.com
SOUTH	No.1-A, Kushal Garden, Peenya Industrial Area, Peenya 2nd Phase, Bangalore - 560 058	93677 87070	93421 44450	sales.south@cp.com service.south@cp.com

Area offices: Ahmedabad, Baroda, Chandigarh, Chennai, Pune • Resident offices: Coimbatore, Erode, Kochi, Jaipur, Raipur, Vizag

Dealer representation at:

Ahmedabad

Aurangabad

Bengaluru

Baroda

Bhubaneswar

Belgaum

Bellari

Bhopal

Chandigrah

Chennai

Cochin • Coimbatore • Dehradun • Delhi • Durgapur • Faridabad • Gandhidham • Gurgaon • Guwahati • Hospet • Hyderabad • Indore • Jaipur • Jammu • Jamshedpur

Jodhpur • Kanpur • Karimnagar • Kathmandu • Katni • Kolhapur • Kolkata • Lucknow • Ludhiana • Madurai • Mumbai • Nagpur • Nashik • Nellore • Noida • Patna
 Phuntsholing • Puduchery • Pune • Raipur • Rajkot • Silvassa • Surat • Thane • Tirupur • Udaipur • Vaizag • Vapi

Toll Free No: 1800 200 0040



© 2010, Chicago Pneumatic. All rights reserved. All mentioned, product names, company names, trademarks and service marks are the properties of their respective owners. Our products are constantly being developed and improved. We thus reserve the right to modify product specifications without prior notice.

Chicago Pneumatic

CPM

Quiet by design, complete and compact







People. Passion. Performance.



Quiet by design, complete and compact

Engineered for high performance, efficiency and reliability, the CPM air compressor series can meet the compressed air demands of a tire shop, maintenance shop, vehicle body shop, paint shop or automotive dealership. Quiet by design, the CPM can be installed almost anywhere, without disturbing your working environment. Base mounted or receiver mounted, with or without dryer, the CPM is the leading rotary screw compressor for service or light industrial applications.

Screw element

Main Benefits:

- Excellent performance
- Assured reliability
- Longer life
- Continuous duty operation
- Lower oil residual in compressed air
- Pulsation free air

Design for tropical condition:

- Pre tensioned flexible drive
- Pressurized canopy
- Natural ventilation passage
- Effective cooling



Why tropical design is essential?

	European Condition	Tropical Condition
Temp	Max 20° C Min Sub Zero	Max 50° C Min Varying
Enviro'	Dust Free, Pressurized & Ventilated	Dusty industrial
Mindset	Use & Throw	Use & Continue using

Why choose CPM screw compressors?

Piston compressors		CPM screw compressors
70 - 75% of the intake air	Air yield	95% of the intake air More air for less power
Greater than 80 dB(A)	Sound level	From 61 to 65 dB(A) Almost as low as most household appliance
For intermittent use	Operation	For continuous use An industrial technology
High content of residual oil and humidity	Air quality	Low oil content and dry air in the version with dryer Cleaner air for better production
Alternating and pulsating	Compression	Continuous and consistent Uniform pressure in line for better functioning utility
High	Vibrations	Absent More reliable components
Thermal circuit breaker	Standard protections	Magnetic and thermal circuit breaker Greater operator safety

Features

Compact dimensions	Ideal for tire shops, maintenance shops, vehicle body or paint shops and automotive dealers, the CPM can offer you a complete unit (with dryer and 200L receiver) on just 1m². You can fit it easily to any free space without trouble.
Quiet operation	Generously sized sound insulation. This results The CPM links the rotary screw technology to a major disturbances to your working environment in noise levels so low that the compressor can be placed in most of the workplaces without
More output and less energy consumption	When compared to piston compressors, the exceptional efficiency of the CPM and the high output of the package ensure reduced power consumption, maximized output (capacity) and low cost per CFM produced.

A complete compressed air package - CPM TMD



A complete system in less than 1m²

- Compressor
- Refrigerated Dryer
- Integrated Tank
- No interconnection piping required
- Pre- Wired
- Low pressure drop
- No installation cost
- Less chance for leakages
- · Machine with first fill oil

Key user benefits









Compressed air plain and simple. Just connect the cables, pipes and press start.

Efficient cooling

Lower internal temperatures make your compressor more reliable and extend lifetime.


Built to last

Designed for continuous duty and very hard working conditions.

Fast & cost effective maintenance

No wearing parts: increases reliability and reduces maintenance

Flow diagram

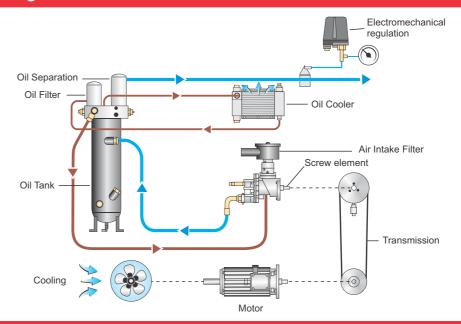



Technical data



Model	HP	(BAR G)	CFM → III →	dB(A) √W√	End Connection	Weight (KG)	
						TM	TMD
CPM 3	3	- 10	8	61	1/2"	175	209
CPM 4	4		11				
CPM 5	5		16	62		178	209
CPM 7	7.5		21			182	216

- Note: 1. Unit performance measured as per ISO 1217: 2009Ed4.
 - 2. Noise level measured according to ISO2151 / Pneurop / CAGI PN8NTC2.
 - 3. All models available with 200 L receiver tank
 - 4. All models available with optional Refrigerated dryers (suffix D).
 - 5. Maximum working pressure for machines with dryer is 9.75 bar